




Electric Blender

Precision Placed Treatments

The Emerald™ Electric Blender is built for durability, efficiency, and safety in high-demand completion operations. Whether working on simul-fracs or split-stream jobs, its 3,600 BHP and fully remote-compatible design deliver the performance and flexibility needed to thrive under pressure.

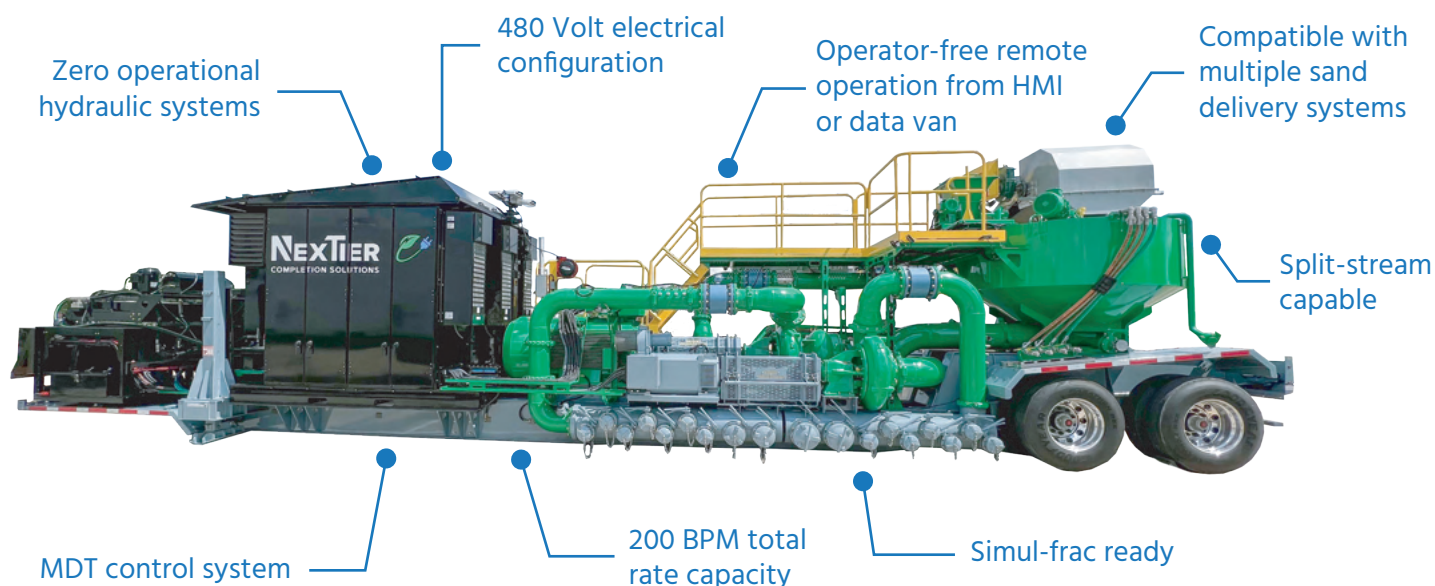

Powerful results you can rely on

- 4.6% reduction in NPT driven by the elimination of operational hydraulic systems
- Advanced e-motor design eliminates 19% engine-related NPT compared to conventional
- 4.3% decrease in NPT events with direct-to-tub proppant delivery versus built-in augers
- 25% increase in overall uptime

Technical Specifications	
Maximum Total Rate	200 bpm
Maximum Proppant Input	32,000 lbs/min
Input Voltage	480 V
Power Outputs	2 x 480 V

Ready to experience the power of the Emerald Electric Blender? Contact us as at **EmeraldFleetTechnology@NexTierOFS.com**.

